

# Worm gearboxes type 030 ÷ 110

## Anticorrosive worm gearboxes basic features

For the selection and all data's see on the Rightangle standard wormboxes

### Single-piece aluminum alloy housing

Is vacuum impregnated (MIL-STD 276) for protection and sealing. No secondary finish required but readily accepts paint. Combines light weight with high tensile strength. Precision machined for alignment of bearings and gearing.

### Single piece alloy steel input shaft and worm shaft.

High helix angle worm is case-hardened (Rc 58-60), ground, teeth are profiled and radiused, for noise reduction and enhanced efficiency.

### Oversized bearings

Support positively-retained, high speed shaft for higher shock load capacity - ideal for frequent starting and reversing application. Premium, Nitrile® high temperature seals each end.

### Flange

Fully modular to IEC and compact integrated motor. NEMA C flange.

### Premium, high temperature Nitrile® output seals

### Bronze alloy worm gears.

Is centrifugally cast onto an iron hub for maximum strength and superior life.

### Oversize bearing

For radial load capability and maximum hollow output shaft diameter.

### Standard STAINLESS STEEL hollow output shaft


### Standard STAINLESS STEEL single output shaft

### Standard ZINC PLATED fasteners

### Impregnated and machined bearing caps

With exterior machined surfaces enable a variety of mounting accessories. Extra-deep thread engagement provided for greater support strength. Zinc plated hardware.

On request



- Special paint
- Viton output seal
- Stainless steel fasteners


oil free



vent free

### Vent Free Design.

No breather or vents to leak! Factory lubricated for life with synthetic, semi-fluid gear lubricant with an operating range of -15°C to 130°C.

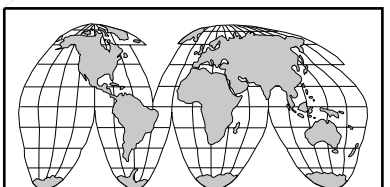

World wide sales network.